


Pin	Power supply		Incrementals signals						Other						
	4	5	14	7	13	6	15	8	1	2	3	9	10	11	12
1Vpp	Up	0V	A+	A-	B+	B-	R+	R-	/	/	/	/	/	/	/
Function	Encoder supply +5VDC	Encoder supply 0V	Sine + signal	Sine - signal	Cosine + signal	Cosine - signal	Index + signal	Index - signal							

2x lifting eye bolts DIN 580 - M8  
Included in delivery.

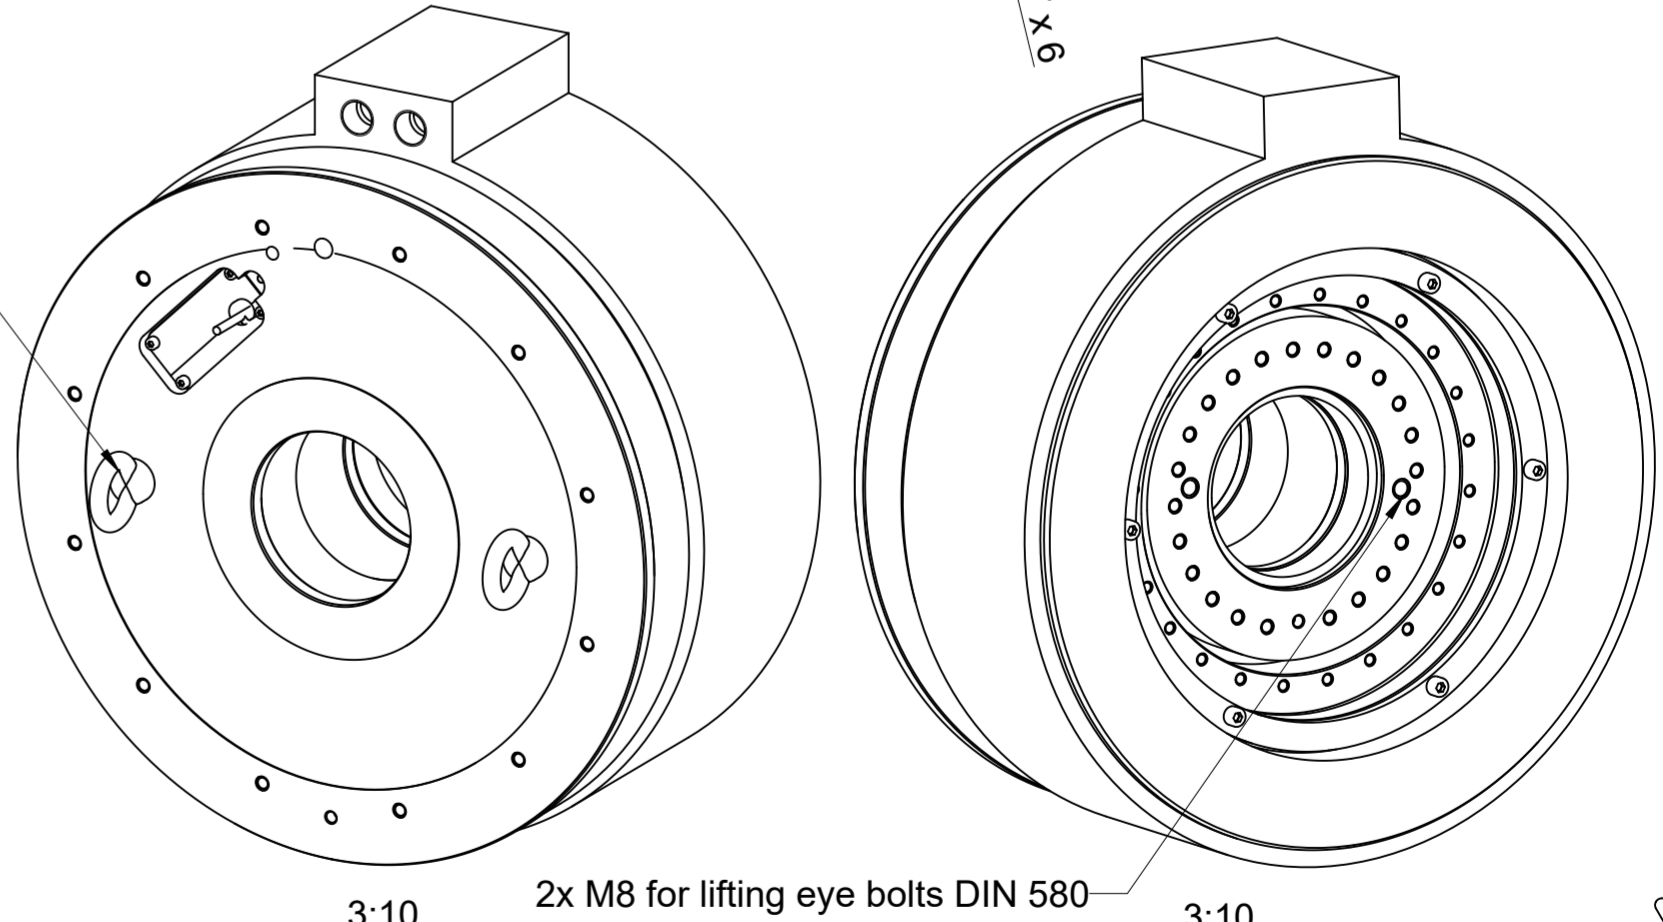

Note A : Dimensions and tolerances are defined in the interface drawing of the TMB+0291-### motor.

Note B : Connection and bending radius are defined in the interface drawing of the TMB+0291-### motor with PT 1000 sensor.

Text: Note modified		ID number: 1307961-##
Original drawing Scale: 1:2 Format: A2		Change No. C134337-05
ASME-RTMB+291#####-CJN- T STANDALONE AXIS		Released: 01-Nov-21
ASME-RTMB+291#####-CJN- T STANDALONE AXIS		Tolerances as per ISO 8015 : 2011
Mating Dimensions / Cotes d'encombrement		Tolerances selon ISO 8015 : 2011
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)		Dimensions without tolerance $\pm 0.5$
ETEL ETEL S.A. 2112 Môtiers SWITZERLAND		Dimensions sans tolérances
Version   Revision   Sheet   Page		1307962-04 - A-01
Document number		1 of 1